


EXEMPLES : CASING WIRE

Description : Round wire for the manufacturing of remote controls and transmission cables used in the automobile, cycle industries and for electric domestic appliances.

Steel : 0,06 to 0,80 % carbon.

Tensile strength : 800 to 2 300 N/mm², as per required specifications.

Coating : - Phosphated.
- Electro-galvanised according to international standards.

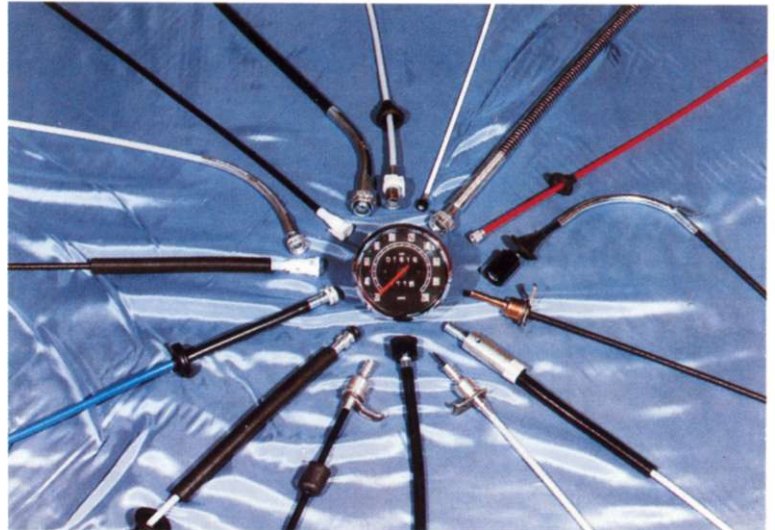

Diameter : 0,80 of 3,00 mm.

Tolerances : ± 0,01 mm.

Packaging : Reels from 500 to 1 000 Kg.

Type	REELS		
	RP 400	RP 700	RP 1000
Weight of wire (Kg)	480	730	980
Ø Flange (mm)	750	750	1 010
Ø I.D. (mm)	80	80	80
Ø O.D. (mm)	472	472	637
Height (mm)	542	702	539

Please note all weights shown are approximate, and issued for guidance only. All measurement are metric.

Unwinding : Dynamic, or static. Unwinding systems are available on request.

Important characteristics : It is recommended to specify the diameter of your wire requirements in mm.

CONFLANDEY reserves the right to modify any of the above details in the pursuit of improvements in quality and service.

CONFLANDEY INDUSTRIES

3 RUE DU CHATEAU AMONCOURT - BP 21 70170 PORT SUR SAONE - FRANCE

Tél. : 33 (3) 84.91.38.38 - FAX : 33 (3) 84.91.47.04

contact@conflandey-industries.com