

EXAMPLES : OFFICE STAPPLE WIRE

Description : Redrawn round or coppered wire for staple manufacture.

Steel : 0,03 to 0,15 % carbon.


Tensite strength : 550 to 1 300 N/mm².

Coating : - Electro-galvanised.
- Coppered.

Diameter : 0,36 to 0,60 mm.

Tolerances : ± 0,005 mm.

Packaging : - Spools from 20 to 100 Kg.
- Reels from 500 to 1 000 Kg.

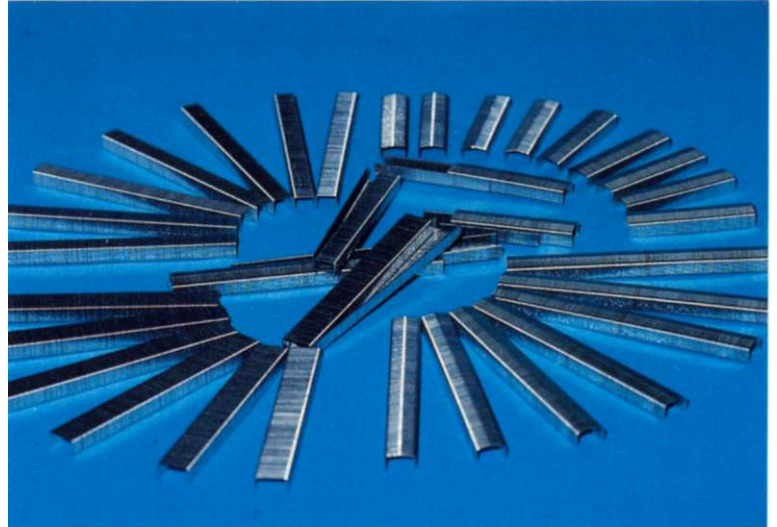

	Spools			Reels		
Type	BB 20	BB 35	MP 100	RP 400	RP 500	RP 1 000
Weight of wire (Kg)	18.5	32	100	480	180	980
Ø Flange dia. (mm)	202	255	355	750	600	1 010
Ø Inside dia. (mm)	32	33	127	80	80	80
Ø Outside dia. (mm)	110	118	224	472	360	637
Height (mm)	179	166	355	542	702	539

Please note all weights shown are approximate, and issued for guidance only. All measurement are metric.

Unwinding : Unwinding systems are available on request.

Important characteristics : It is recommended to specify the diameter of your wire requirements in mm.

CONFLANDEY reserves the right to modify any of the above details in the pursuit of improvements in quality and service.

CONFLANDEY INDUSTRIES

3 RUE DU CHATEAU AMONCOURT - BP 21 70170 PORT SUR SAONE - FRANCE

Tél. : 33 (3) 84.91.38.38 - FAX : 33 (3) 84.91.47.04

contact@conflandey-industries.com