

EXEMPLES : LIGHT INDUSTRIAL STAPLE WIRE

Description : Round or flat wire for the manufacturing of staples for buildings, wood and furniture upholstery.

Steel : 0,06 to 0,50 % carbon.

Tensile : 600 to 1 370 N/mm².


Coating : - Electro-galvanised.
- Liquor finish.

Size range : Rounds wire : 0,64 to 1,20 mm.
Flat wires : on special request.

Tolerances : Rounds wires : $\pm 0,005$ mm.
Flat wires : $\pm 0,02$ mm on width.
 $\pm 0,015$ mm on thickness.

Packaging :

Round wires : - Spools from 100 to 250 Kg.
- Pay-off pack drums of 220 Kg (4 drums per pallet).
- Reels from 500 to 1 000 Kg.

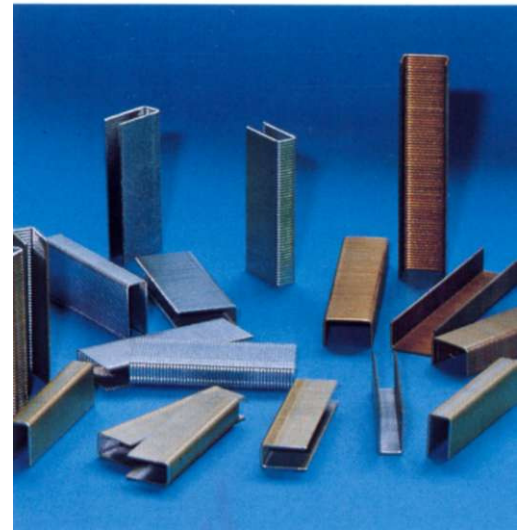

Flat wire : - Spools of 33 Kg.
- Coils from 18 to 32 Kg.
- Traverse wound reels J 55 of 53 Kg.
- Reels RP 300 of 250 Kg.

Type of wire	ROUND WIRE							FLAT WIRE				
	Spools		Pay-off packs drums	Reels				Spools	Coils		Traverse wound reels	Reels
Type	MP 100	RP 300		RP 400	RP 500	RP 700	RP 1 000		BB 40	20 K		
Weight of wire (Kg)	100	250	220	480	480	730	980	33	18 / 22	28 / 32	53	250
Ø Flange dia (mm)	355	560	515	750	600	750	1 010	332	450 / 480	470 / 500	425	560
Ø Inside Dia. (mm)	127	56	/	80	80	80	80	201	300 / 330	450 / 480	350	56
Ø Core Dia. (mm)	224	296	325 chimey	472	360	472	637	206	/	/	358	296
Height (mm)	355	336	760	542	702	702	539	125	150	120	100	340

Please note all weights shown are approximate, and issued for guidance only. All measurement are metric.

Unwinding : Dynamic or static. Unwinding systems are available on request.

Important characteristics : It is recommended to specify the diameter of your wire requirements in mm.

CONFLANDEY reserves the right to modify any of the above details in the pursuit of improvements in quality and service.

CONFLANDEY INDUSTRIES

3 RUE DU CHATEAU AMONCOURT - BP 21 70170 PORT SUR SAONE - FRANCE

Tél. : 33 (3) 84.91.38.38 - FAX : 33 (3) 84.91.47.04

contact@conflandey-industries.com